


NOTES: UNLESS OTHERWISE SPECIFIED


1. RESISTANCE VALUES ARE IN OHMS,  
1/4 W, 5%.
2. CAPACITANCE VALUES ARE 33  
PICOFARADS, 5%, 50V.
3. J7,J9, R1-4 ARE CUSTOMER SUPPLIED  
AND INSTALLED.
4. J10 AND J11 PINS 1,2,4,7,13,18,20,23,24,  
29,35,37,40,45,48,50,56,60 ARE  
CONNECTED TO GROUND.

REVISIONS				
LTR	DESCRIPTION	SIGNATURE AND DATE		
		DATE	DATE	DATE
A	ECO 40-2823	11/1/82	12/1/82	12/1/82
B	ECO 40-3051	11/1/82	12/1/82	12/1/82

				ITEM NO.		PART NUMBER		DESCRIPTION	
QUANTITY PER DASH NO.				PARTS LIST					
SCALE: <u>None</u>				SIGNATURE		DATE		3053 BOWERS AVE. SANTA CLARA CALIF. 95051	
TOL. <u>2 P.C.</u> <u>3 P.C.</u> <u>ANGLE</u>				DRN BY <u>W. J. ...</u>		DATE <u>3-2</u>			
MATERIAL:				CHK BY <u>W. J. ...</u>		DATE <u>3-2</u>			
FINISH				AUTH BY		TITLE		SCHEMATIC, ISBC614 EXPANSION BACKPLANE	
SIZE <u>D</u>				CODE		SHEET <u>1</u> OF <u>1</u>		DRAWING NO. <u>144079</u>	
REV <u>B</u>									

MASTER

ZONE	DESCRIPTION	DATE	BY	CHKD
CHNG				
A	DPM 1-0000	10/8/77	10/8/77	10/8/77
B	ECO 40-1671	10/8/77	10/8/77	10/8/77

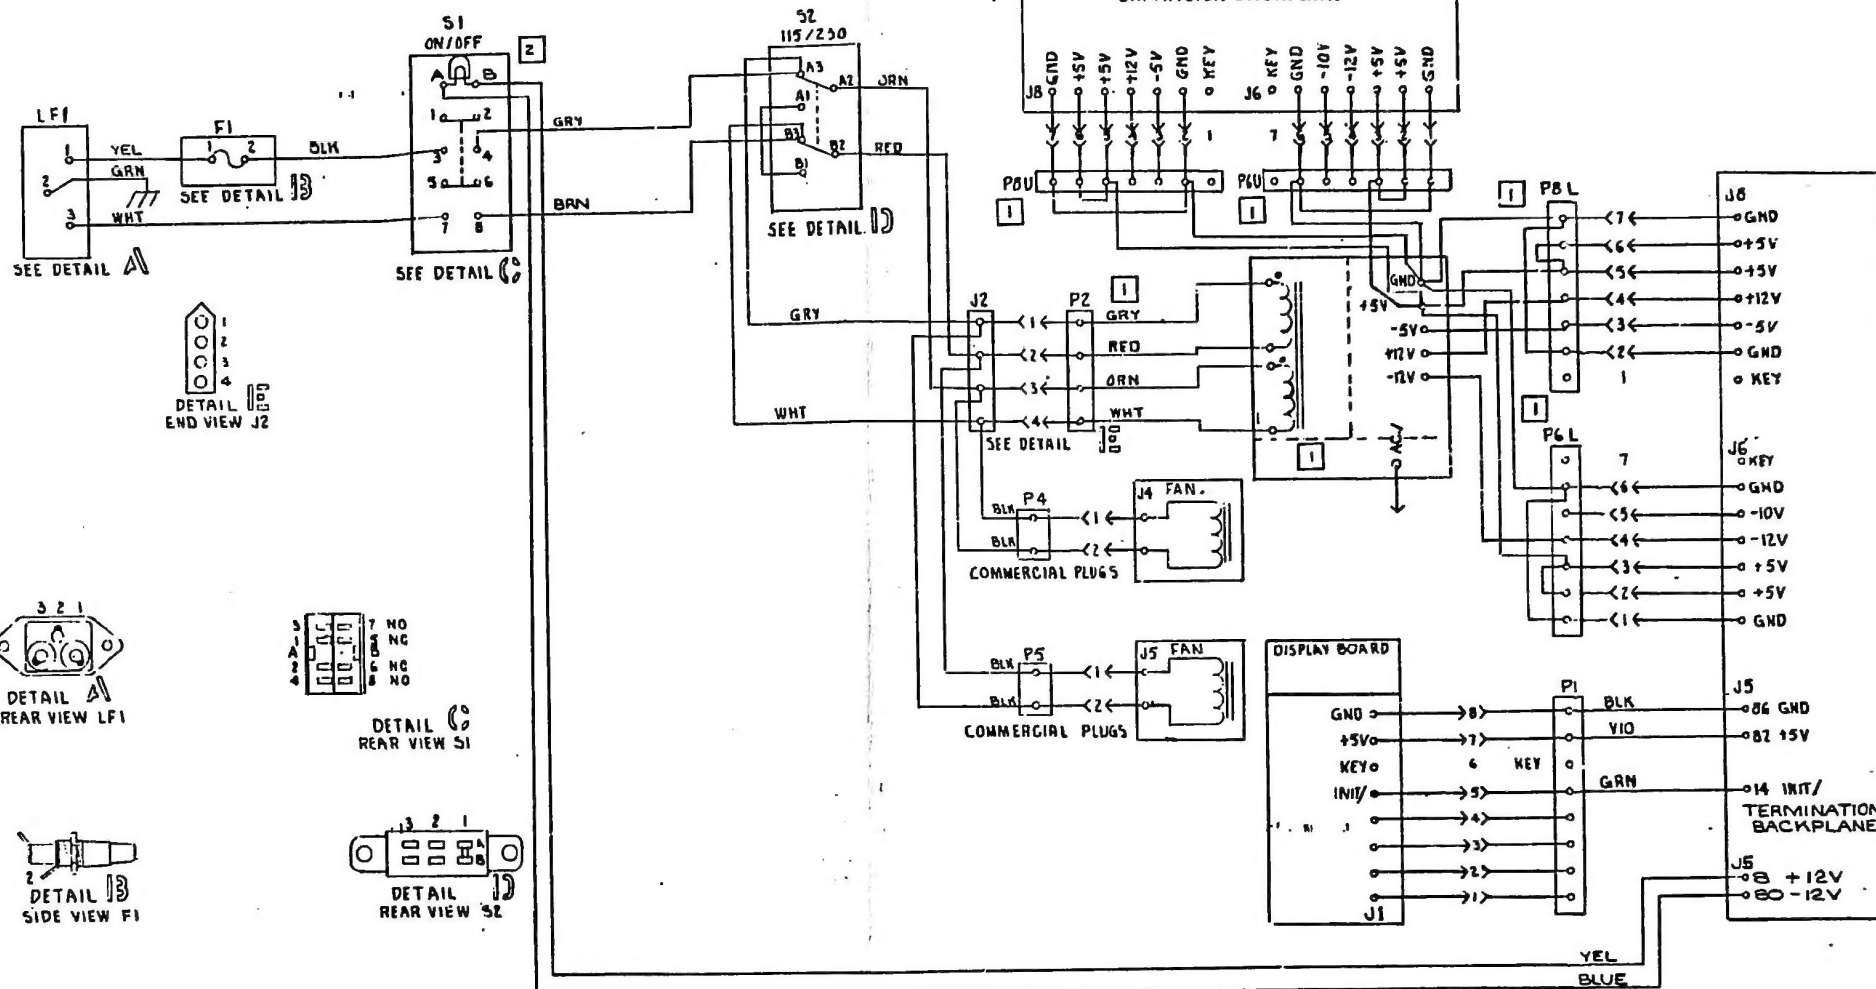


NOTES: UNLESS OTHERWISE SPECIFIED

- POWER SUPPLY AND HARNESS IS SUPPLIED BY VENDOR.
- BLUE WIRE SHOULD CONNECT TO GOLD TERMINAL.


QUANTITY	PER UNIT	PART NUMBER	DESCRIPTION
1	1	1	1
2	2	2	2
3	3	3	3
4	4	4	4
5	5	5	5
6	6	6	6
7	7	7	7
8	8	8	8
9	9	9	9
10	10	10	10
11	11	11	11
12	12	12	12
13	13	13	13
14	14	14	14
15	15	15	15
16	16	16	16
17	17	17	17
18	18	18	18
19	19	19	19
20	20	20	20
21	21	21	21
22	22	22	22
23	23	23	23
24	24	24	24
25	25	25	25
26	26	26	26
27	27	27	27
28	28	28	28
29	29	29	29
30	30	30	30
31	31	31	31
32	32	32	32
33	33	33	33
34	34	34	34
35	35	35	35
36	36	36	36
37	37	37	37
38	38	38	38
39	39	39	39
40	40	40	40
41	41	41	41
42	42	42	42
43	43	43	43
44	44	44	44
45	45	45	45
46	46	46	46
47	47	47	47
48	48	48	48
49	49	49	49
50	50	50	50
51	51	51	51
52	52	52	52
53	53	53	53
54	54	54	54
55	55	55	55
56	56	56	56
57	57	57	57
58	58	58	58
59	59	59	59
60	60	60	60
61	61	61	61
62	62	62	62
63	63	63	63
64	64	64	64
65	65	65	65
66	66	66	66
67	67	67	67
68	68	68	68
69	69	69	69
70	70	70	70
71	71	71	71
72	72	72	72
73	73	73	73
74	74	74	74
75	75	75	75
76	76	76	76
77	77	77	77
78	78	78	78
79	79	79	79
80	80	80	80
81	81	81	81
82	82	82	82
83	83	83	83
84	84	84	84
85	85	85	85
86	86	86	86
87	87	87	87
88	88	88	88
89	89	89	89
90	90	90	90
91	91	91	91
92	92	92	92
93	93	93	93
94	94	94	94
95	95	95	95
96	96	96	96
97	97	97	97
98	98	98	98
99	99	99	99
100	100	100	100

MASTER

THIS DRAWING, UNLESS OTHERWISE SPECIFIED, IS THE PROPERTY OF INTEL CORPORATION. NO PARTS OR INFORMATION CONTAINED HEREIN IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM INTEL CORPORATION.

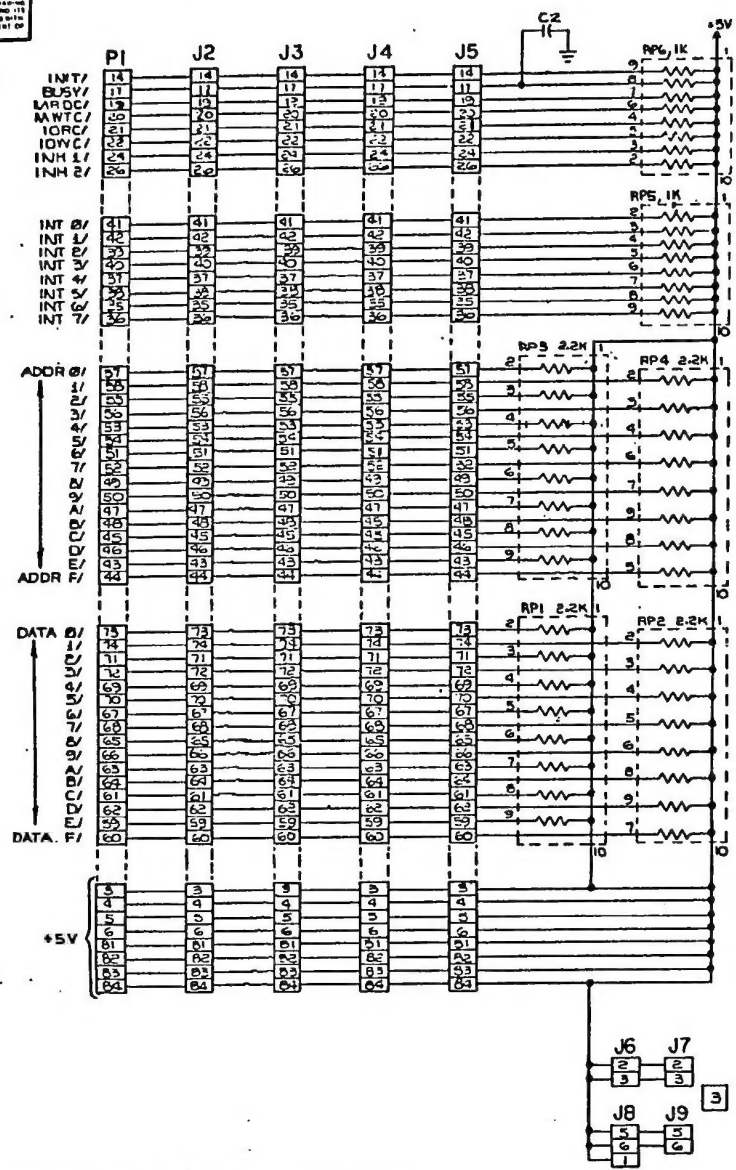

4. J10 PINS 1,2,4,7,13,18,20,23,24,29,35,37,40,45,48,50,56,60 ARE CONNECTED TO GROUND.  
3. J7, AND J9 ARE CUSTOMER SUPPLIED AND INSTALLED.  
2. CAPACITANCE VALUES ARE 33 PICOFARADS, 5%, 50V.  
1. RESISTANCE VALUES ARE IN OHMS, 1/4 W, 5%.  
NOTES: UNLESS OTHERWISE SPECIFIED.

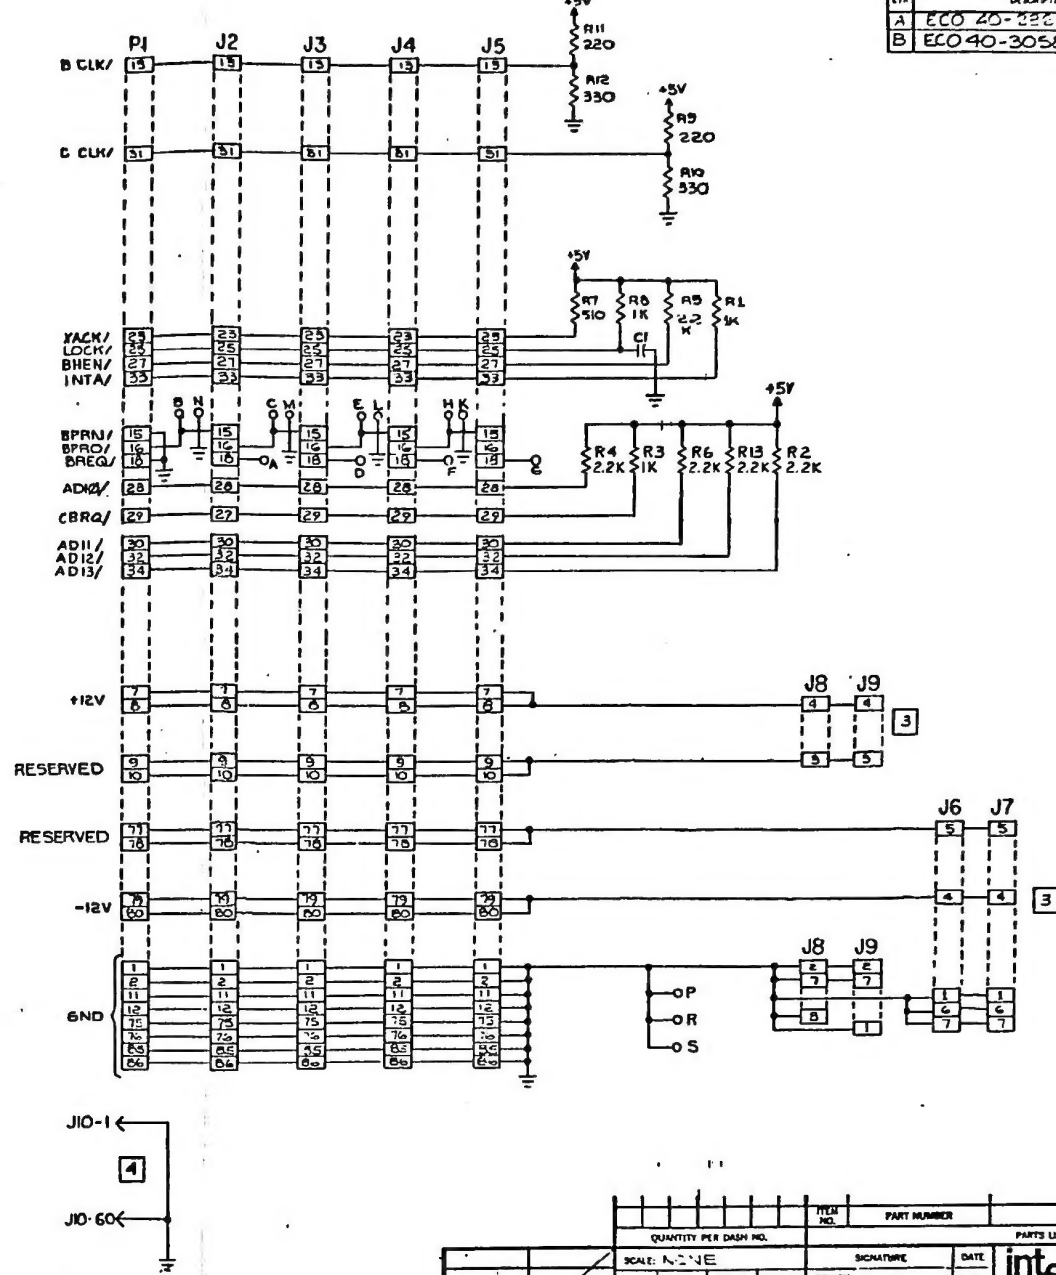

J10-1  
J10-60

LT	DESCRIPTION	REV	DATE
A	ECO 40-3303	1	1/1/78
B	ECO 40-3058	1	1/1/78

QUANTITY PER DASH NO.		ITEM NO.		PART NUMBER		DESCRIPTION	
SCALE: NONE		SIGNATURE		DATE		intel	
TOL: 2 PLC 3 PLC ANGLE		DRN BY		DATE		3055 BOWEN AVE. SANTA CLARA, CALIF. 95051	
MATERIAL		CHK BY		DATE		TITLE	
FINISH		AUTH BY		DATE		SCHEMATIC, USB 604	
NEXT ASSY		USED ON		CODE		SHEET 1 OF 1	
						D 40 144076 18	